

# Intencity

by Lecapitaine



High performance insulation, K-value of 0,33 W/m2.°C




Unique design



Simplified maintenance



Wide range of option

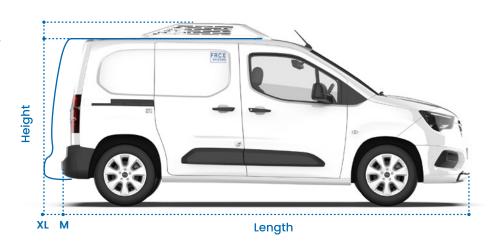

## **Technical features**

For thermal and **electrical** vehicles (4)



Over leng		Overall height	Wheelbase	Volume	Payload capacity*	Vehicle gross weight	Internal length	Internal height	Internal width	Width between wheel arches
M 4 403 mm	Insulated van	0.705	170 2	up to 465 kg	up to 2,020 t	1.400				
	mm	(without fairing) 1 820 mm	2 785 mm	1,70 m³	up to 465 kg	up to 2,390 t	1 490 mm	1 040 mm	1 250 mm	1 126 mm
XL 4 753 mm		refrigerated van (with fairing**) 1 980 mm	2 975 mm	2,15 m³	up to 705 kg	up to 2,380 t	1 840 mm			
					up to 309 kg	up to 2,385 t				

- \* Depending on vehicle's configuration
- \*\* Refrigerated unit fairing is optional

# **Available configurations**



#### Adjustable shelving

Easy to install, they allow you to organize your deliveries. Need more space? Lift them to optimize the loading area.

### Removable plate

This layout allows you to cleverly store your products to optimize your deliveries.

#### Load restraint tracks

Secure your goods and deliveries with our load restraint tracks. Configure their placement to suit your needs.

#### Strip curtains

To preserve the freshness of your products, the PVC strip curtain reduces temperature loss while allowing easy access to your goods.

Other options are available. For more information, contact the sales department via the QR code below.



Scan this OR code and ask for a quote